



FEATURES

- Wire entry ports on one side only.
- Eliminates the need for cover and taping.
- Insulated with high-dielectric strength plastisol.
- Molded for precise fit and supplied with removable access plugs over the hex screws.
- Abrasion and chemical resistant.
- UV resistant.
- Will not support combustion.

SPECIFICATIONS

- UL Listed 486B Wire Connector (Dry location).
- **Temperature Rating/Voltage:** AL9CU.
Cold temperature rated to -45 °C, rated 600V, 90 °C.
- **Wire Type:** Dual rated for use with copper and/or aluminum cables.
Not for fine-stranded, flexible wire.
- **Torque Chart:** See page 34.

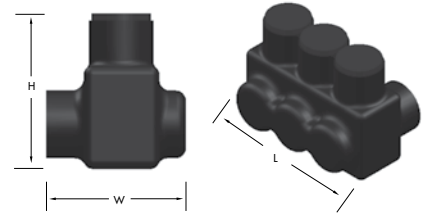


Figure varies by number of wire ports.

CAT. NO.	NO. OF PORTS	WIRE RANGE	LENGTH (L) (IN.)	WIDTH (W) (IN.)	HEIGHT (H) (IN.)	MAX. TORQUE VALUE (IN./LBS.)	HEX/WRENCH SIZE (IN.)		STD. CTN. QTY.
IPL4-3	3	4-14 AWG	1.550	1.188	1.375	45	Slotted	●	12
IPL4-3A	3	4-14 AWG	1.550	1.188	1.375	45	1/8	●	12
IPL4-4	4	4-14 AWG	1.970	1.188	1.375	45	Slotted	●	6
IPL4-4A	4	4-14 AWG	1.970	1.188	1.375	45	1/8	●	6
IPL4-5	5	4-14 AWG	2.390	1.188	1.375	45	Slotted	●	6
IPL4-6	6	4-14 AWG	2.810	1.188	1.375	45	Slotted	●	6
IPL4-8	8	4-14 AWG	3.660	1.188	1.375	45	Slotted	●	4
IPL4-8A	8	4-14 AWG	3.660	1.188	1.375	45	1/8	●	4
IPL4-10	10	4-14 AWG	4.500	1.188	1.375	45	Slotted	●	4
IPL4-12	12	4-14 AWG	5.100	1.188	1.375	45	Slotted	●	2
IPL4-14	14	4-14 AWG	6.180	1.188	1.375	180	Slotted	●	2
IPL1/0-3	3	1/0-14 AWG	2.240	1.500	1.688	180	3/16	●	6
IPL1/0-4	4	1/0-14 AWG	2.890	1.500	1.688	180	3/16	●	6
IPL1/0-5	5	1/0-14 AWG	3.540	1.500	1.688	180	3/16	●	6
IPL1/0-6	6	1/0-14 AWG	4.190	1.500	1.688	180	3/16	●	4
IPL1/0-8	8	1/0-14 AWG	5.490	1.500	1.688	180	3/16	●	4
IPL1/0-10	10	1/0-14 AWG	6.820	1.500	1.688	180	3/16	●	3
IPL1/0-12	12	1/0-14 AWG	8.120	1.500	1.688	180	3/16	●	2
IPL1/0-14	14	1/0-14 AWG	9.420	1.500	1.688	250	3/16	●	2
IPL3/0-3	3	3/0-6 AWG	2.630	1.600	1.800	250	5/16	●	6
IPL3/0-4	4	3/0-6 AWG	3.410	1.600	1.800	250	5/16	●	4
IPL3/0-5	5	3/0-6 AWG	4.190	1.600	1.800	250	5/16	●	4
IPL3/0-6	6	3/0-6 AWG	4.970	1.600	1.800	250	5/16	●	3
IPL3/0-8	8	3/0-6 AWG	6.530	1.600	1.800	250	5/16	●	3