

Insulated Grounding Bushings



Used with locknut to terminate service conduit or fittings to cabinet. Tin Plated Aluminum alloy lug provided for bonding jumper to neutral busbar. Plastic liner prevents damage to wire insulation.

 File No. E20412

Malleable Iron / Zinc Plated Steel Screws / Plastic Metaliner - 150°C

Catalog Number	Grounding Lug Wire Capacity		Trade Size	Unit Qty.	Std. Pkg.
	Min. Solid Strand	Max. Solid Strand			
381	14 to 4		1/2"	50	500
382	14 to 4		3/4"	50	500
383	14 to 4		1"	25	250
384	14 to 1/0		1 1/4"	20	200
384-14	14 to 4		1 1/4"	20	200
385	14 to 1/0		1 1/2"	20	200
385-14	14 to 4		1 1/2"	20	200
386	14 to 1/0		2"	10	100
386-14	14 to 4		2"	10	100
387	14 to 1/0		2 1/2"	---	25
387-40	6 to 250 MCM		2 1/2"	---	25
388	14 to 1/0		3"	---	25
388-40	6 to 250 MCM		3"	---	25
389	14 to 1/0		3 1/2"	---	25
389-40	6 to 250 MCM		3 1/2"	---	25
390	14 to 1/0		4"	---	20
390-40	6 to 250 MCM		4"	---	20
391	6 to 250 MCM		5"	---	5
392	6 to 250 MCM		6"	---	5

Insulated Grounding Bushings



Used with locknut to terminate service conduit or fittings to cabinet. Tin Plated Aluminum alloy lug provided for bonding jumper to neutral busbar. Plastic liner prevents damage to wire insulation.

 File No. E20412

Zinc Die Cast / Zinc Plated Steel Screws / Plastic Metaliner - 150°C

Catalog Number	Grounding Lug Wire Capacity		Trade Size	Unit Qty.	Std. Pkg.
	Min. Solid Strand	Max. Solid Strand			
381-DC	14 to 4		1/2"	50	500
382-DC	14 to 4		3/4"	50	500
383-DC	14 to 4		1"	25	250
384-DC	14 to 1/0		1 1/4"	20	200
384-DC14	14 to 4		1 1/4"	20	200
385-DC	14 to 1/0		1 1/2"	20	200
385-DC14	14 to 4		1 1/2"	20	200
386-DC	14 to 1/0		2"	10	100
386-DC14	14 to 4		2"	10	100
387-DC	14 to 1/0		2 1/2"	---	25
387-DC40	6 to 250 MCM		2 1/2"	---	25
388-DC	14 to 1/0		3"	---	25
388-DC40	6 to 250 MCM		3"	---	25
389-DC	14 to 1/0		3 1/2"	---	25
389-DC40	6 to 250 MCM		3 1/2"	---	25
390-DC	14 to 1/0		4"	---	20
390-DC40	6 to 250 MCM		4"	---	20

Insulated Grounding Bushings



Used with locknut to terminate service conduit or fittings to cabinet. Tin Plated Aluminum alloy lug provided for bonding jumper to neutral busbar. Plastic liner prevents damage to wire insulation.

File No. E20412

Zinc Die Cast / Zinc Plated Steel Screws / Plastic Metaliner - 150°C

Catalog Number	Grounding Lug Wire Capacity		Trade Size	Unit Qty.	Std. Pkg.
	Min. Solid	Max. Strand			
381-DC	14	to 4	1/2"	50	500
382-DC	14	to 4	3/4"	50	500
383-DC	14	to 4	1"	25	250
384-DC	14	to 1/0	1 1/4"	20	200
384-DC14	14	to 4	1 1/4"	20	200
385-DC	14	to 1/0	1 1/2"	20	200
385-DC14	14	to 4	1 1/2"	20	200
386-DC	14	to 1/0	2"	10	100
386-DC14	14	to 4	2"	10	100
387-DC	14	to 1/0	2 1/2"	---	25
387-DC40	6	to 250 MCM	2 1/2"	---	25
388-DC	14	to 1/0	3"	---	25
388-DC40	6	to 250 MCM	3"	---	25
389-DC	14	to 1/0	3 1/2"	---	25
389-DC40	6	to 250 MCM	3 1/2"	---	25
390-DC	14	to 1/0	4"	---	20
390-DC40	6	to 250 MCM	4"	---	20

Bushings



Used with locknut to protect conductors inside threaded rigid or IMC conduit entering a box. Rounded surface of bushing prevents damage to wire insulation.

File No. E9391: 321 thru 332

File No. E11259: 321-B thru 330-B

File No. LR39354

Polypropylene - 105°C

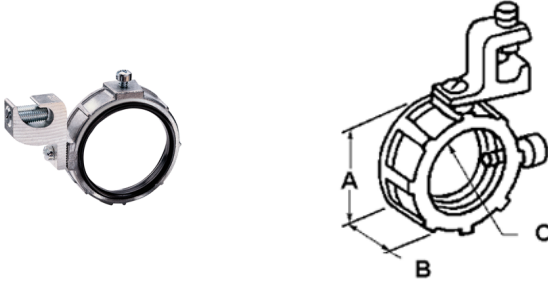
Catalog Number	Trade Size	Unit Qty.	Std. Pkg.
321	1/2"	100	1000
322	3/4"	100	1000
323	1"	50	500
324	1 1/4"	---	100
325	1 1/2"	---	100
326	2"	---	50
327	2 1/2"	---	25
328	3"	---	25
329	3 1/2"	---	25
330	4"	---	20
331	5"	---	5
332	6"	---	5

Nylon - 150°C

Catalog Number	Trade Size	Unit Qty.	Std. Pkg.
321-B	1/2"	100	1000
322-B	3/4"	100	1000
323-B	1"	50	500
324-B	1 1/4"	---	100
325-B	1 1/2"	---	100
326-B	2"	---	50
327-B	2 1/2"	---	25
328-B	3"	---	25
329-B	3 1/2"	---	25
330-B	4"	---	20

Zinc

Images

[Download Photo Image](#)[Download Dimensional Image](#)

Dimension A in Inches: 1-7/8

Dimension B in Inches: 1/2

Dimension C in Inches: 1-15/16

Application

Used with locknut to terminate service conduit to cabinet. Lug provided for bonding jumper to neutral busbar. Grounding lug; aluminum alloy 6061-T6. Plastic metaliner prevents damage to wire insulation. Rated 150 degree C.

Product Information

Material: Zinc Die Cast
Finish: Ball burnished, mirror smooth,
Grounding lug: Tin electro-plate

Certifications & Codes:

Federal Specification Number: A-A-50553
NEMA Standard: FB-1
UL File Number: E20412
UL Standard: UL-514B
UNSPSC: 39121312

Catalog ID: 384-DC**UPC Number:** 781747093844**Description:** Bushing, Insulated, Grounding, Zinc Die Cast, Size 1-1/4 Inch, 14-1/0 Lug

Application: Used with locknut to terminate service conduit to cabinet. Lug provided for bonding jumper to neutral busbar. Grounding lug; aluminum alloy 6061-T6. Plastic metaliner prevents damage to wire insulation. Rated 150 degree C.

Trade Size: 1-1/4"**Std Pkg Qty:** 200**Unit Qty:** 20